



מדינת ישראל  
STATE OF ISRAEL

Ministry of Justice  
Patent Office

משרד המשפטים  
לשכת הפטנטים

RECEIVED

MAR 27 2002

Technology Center 2100

THE undersigned certify that annexed  
hereto is a true copy of the  
document as originally  
deposited with the patent  
application of which  
part is specified on the

זאת לתעודה כי רצופים  
בזה העתקים נכונים של  
המסמכים שהופקדו  
לכתחילה עם הבקשה  
לפטנט לפי הפרטים  
הרשומים בעמוד הראשון  
של הנספח.

CERTIFIED COPY OF  
PRIORITY DOCUMENT

This 23-12-2001 היום

רשם הפטנטים

Commissioner of Patents

נתאשר  
Certified

לשימוש הלשכה  
For Office Use

חוק הפטנטים, תשכ"ז - 1967  
PATENTS LAW, 5727-1967

מספר: Number	139628
תאריך: Date	12-11-2000
הוקדם / נדחה Ante / Post-dated	

Genuine copy of the original  
Tali Danenberg-Harpaz, Adv.  
Date: 19.12.2001

בקשה לפטנט  
Application for Patent

אני, (שם המבקש, מענו - ולגבי גוף מאוגד - מקום התאגדותו)  
I, (Name and address of applicant, and, in case of a body corporate, place of incorporation)

ECI TELECOM LTD.  
30 Hasivim Street  
Petach Tikva 49517  
(an Israeli Company)

א.י. סי. איי טלקום בע"מ  
רחוב הסיבים 30  
פתח תקווה 49517  
(חברה ישראלית)

הממציא(ים):

בעל אמצאה מכח הדין Right of Law Owner, by virtue of

of an invention the title of which is:

שחזור השתקפות נתונים במערכת מפורזת

ששמה הוא:  
(בעברית)  
(Hebrew)

DATA MIRRORING RESTORATION IN A  
DISTRIBUTED SYSTEM

(באנגלית)  
(English)

hereby apply for a patent to be granted to me in respect thereof

מבקש בזאת כי ינתן לי עליה פטנט.

בקשת חלוקה Application for Division	בקשת פטנט מוסף Application for Patent of Addition	דרישת דין קדימה Priority Claim		
מבקשת פטנט from Application	לבקשה/לפטנט to Patent/Application	מספר/סימן Number/Mark	תאריך Date	מדינת האירוע Convention Country
No. _____ מס' _____ dated	No. _____ מס' _____ dated			
* יפוי כח: כללי/מיוחד - רצוף בזה/עוד יוגש P.O.A.: general/specific - attached/to be filed later הוגש בענין _____ המען למסירת הדעות ומסמכים בישראל Address for Service in Israel				
ד"ר גיל אינגל א.י. סי. איי טלקום בע"מ ת.ד. 3083 פתח תקווה 41930				
ECIP/F017/IL				
חתימת המבקש Signature of Applicant		היום 7 בחודש November שנת 2000		
Simon Kay		לשימוש הלשכה For Office Use		



טופס זה, כשהוא מוטבע בחותם לשכת הפטנטים ומשלים, במספר ובתאריך ההגשה, הינו אישור להגשת הבקשה שפרטיה רשומים לעיל.  
This form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application, the particulars of which are set out above.

\* מחק את המיותר Delete whatever is inapplicable

שחזור השתקפות נתונים במערכת מפורזת

---

**DATA MIRRORING RESTORATION IN A  
DISTRIBUTED SYSTEM**

ECI Telecom Ltd.

אי סי איי טלקום בע"מ

ECIP/F017/IL

## **DATA MIRRORING RESTORATION IN A DISTRIBUTED SYSTEM**

### **Field of the Invention**

The invention is in the field of data mirroring restoration in a distributed system in general, and in a telecommunication network management system in particular.

### **Background of the Invention**

Telecommunication network management systems are distributed systems including one or more management layers of client/server architectures in which a server manages a master volume of data containing a multitude of data objects each including one or more attributes each having a prevailing value, and its clients each manage a volume of data mirroring the master volume of data. A temporary communication downtime between a server and a client can potentially lead to a discrepancy between the client's volume of data and the master volume of data on its reconnection to the server. In the affirmative, this necessitates that the freshly reconnected client's volume of data be resynchronized to the master volume of data prior to resumption of full service.

One approach for data mirroring restoration at a freshly reconnected client involves an automatic complete upload of the prevailing values of all the attributes of all the data objects from the master volume of data to the client's volume of data on its reconnection to the server. This approach affords complete data mirroring consistency at a freshly reconnected client, however, it is relatively slow since it effectively requires the reformatting of a freshly reconnected client's volume of data.

Another approach also affording complete data mirroring consistency at a freshly reconnected client is based on the discrimination of those data objects updated during a communication downtime period  $T_e - T_s$  where  $T_e$  is the end of the communication downtime period and  $T_s$  is the start of the communication downtime period. This approach is enabled by the server managing a data

structure listing a time signature in respect of each and every data object in its master volume of data specifying the time of the last occurrence of an alteration of the prevailing value of one of its attributes. This approach is again relatively slow since it requires a decision to be made in respect of each and every data object in the master volume of data, and moreover, the additional data structure imposes additional storage requirements at the server which is a scarce resource.

### **Summary of the Invention**

In accordance with the present invention, there is provided for use in a distributed system including a server managing a master volume of data including a plurality of at least one static attribute and at least one dynamic attribute whose prevailing values in the master volume of data are respectively updated and not updated as a consequence of a command from a client, and at least two clients C1 and C2 each managing a volume of data intended to mirror the master volume of data, a method for data mirroring restoration at a client freshly reconnected to the server after a communication downtime period, the method comprising the steps of:

- (a) storing prevailing values of dynamic attributes of the master volume of data in temporary storage at the server;
- (b) storing prevailing values of static attributes of the master volume of data in persistent storage at the server;
- (c) providing the server with a master synchronization counter  $V_S$  incremented by the updating of the prevailing values of one or more static attributes in the master volume of data as a consequence of a command from a first client C1 of the at least two clients;
- (d) providing each client with a synchronization counter  $V_C$ , the synchronization counter  $V_{C2}$  of a second client C2 of the at least two clients only being synchronized with the master synchronization counter  $V_S$  on the successful uploading of the prevailing values of the static attributes updated in

the master volume of data as a consequence of the command from the first client C1 whereby its volume of data mirrors the master volume of data; and

(e) uploading from the master volume of data to the freshly reconnected client's volume of data, the prevailing values of all its dynamic attributes and, in the case that its synchronization counter  $V_{C2} < V_S$ , the prevailing values of at least all of its static attributes whose prevailing values were updated during the communication downtime period, otherwise in the case that  $V_S = V_{C2}$  taking no data mirroring restoration action in respect of the static attributes.

The present invention is based on the notion that by classifying the attributes stored in a server's master volume of data into two different types, thereby enabling different uploading strategies, data mirroring restoration can be expedited without the downside of excessive storage requirements, excessive computational loads, and the like. The present invention is particularly suitable for data mirroring restoration in telecommunication network management systems since they typically include thousands of data objects, and many thousands of attributes.

### **Brief Description of the Drawings**

In order to understand the invention and to see how it can be carried out in practice, preferred embodiments will now be described, by way of a non-limiting examples only, with reference to the accompanying drawings, in which similar parts are likewise numbered, and in which:

Fig. 1 is a schematic representation of a telecommunication network management system constructed and operative in accordance with the present invention;

Figs. 2A and 2B are schematic representations showing the management of a transaction log kept by a server of the telecommunication network management system of Figure 1;

Figs. 3A and 3B are a flow diagram of the uploading of the prevailing values of static attributes from a server's master volume of data to a freshly

reconnected client's volume of data in accordance with the data mirroring restoration method of the present invention; and

Fig. 4 is a flow diagram of a degenerate version of the data mirroring restoration method of Figures 3A and 3B.

### **Detailed Description of the Drawings**

Figure 1 shows a Telecommunication Network Management System denoted TNMS including two Element Management System (EMS) workstations (constituting two clients denoted C1 and C2) connected to a Network Element (NE) workstation (constituting a server denoted SRV).

The NE workstation manages a master volume of data denoted MVD including a total of  $n$  data objects  $DO_1, DO_2, \dots, DO_n$  each including a total of  $n$  dynamic attributes  $DA_1, DA_2, \dots, DA_n$  and a total of  $n$  static attributes  $SA_1, SA_2, \dots, SA_n$ . The prevailing values of the dynamic attributes are stored in temporary storage, and are not updated as a consequence of a command from one of the clients. The prevailing values of the static attributes are stored in persistent storage, and are updated as a consequence of a command from one of the clients. The NE workstation keeps a master synchronization counter  $V_s$  which is incremented on each occurrence of the updating of one or more static attributes of a data object. The NE workstation keeps a stack-like transaction log denoted LOG for storing up to  $N$  data object identifiers on a First In First Out (FIFO) in respect of the updating of the prevailing values of one or more of their static attributes. The pushing of a new data object onto the transaction log when full automatically causes the deletion of the oldest data object in the transaction log as depicted in Figure 2A showing a new  $DO_{45}$  listing pushing the oldest  $DO_7$  listing out of the transaction log. The one exception to this FIFO rule is that the pushing of a new data object onto the transaction log when full automatically causes a previous listing of the same data object to be deleted as depicted in Figure 2B in respect of two  $DO_{23}$  listings. This is because the transaction log needs only list a single data object once since the prevailing

values of all the static attributes of a data object are uploaded together, and therefore additional listings would be superfluous.

Each EMS workstation manages a volume of data denoted CVD which is intended to mirror the NE workstation's master volume of data, and keeps a synchronization counter  $V_C$  which is synchronized with the master synchronization counter  $V_S$  in one of two different ways as follows: In the case an EMS workstation is the source of a command updating one or more static attributes in the master volume of data, then its synchronization counter  $V_C$  is synchronized with the master synchronization counter  $V_S$  when the prevailing values at the NE workstation have been successfully updated as a consequence of the command. Against this, in the case that an EMS workstation is not the source of a command updating one or more static attributes in the master volume of data, then its synchronization counter  $V_C$  is only synchronized with the master synchronization counter  $V_S$  after its volume of data mirrors the master volume of data. Or, in other words, after it has successfully uploaded the prevailing values of the static attributes updated as a consequence of a command from another EMS workstation.

Figures 3A and 3B show that reconnection of the client  $V_{C2}$  to the server can lead to one of three possible uploads from the server's master volume of data to its volume of data as follows: First, a complete upload of the prevailing values of all the dynamic attributes and all the static attributes in the case that  $V_S - V_{C2} > N$ . Second, a partial upload of the prevailing values of all the dynamic attributes, and all the static attributes of the last  $V_S - V_C$  data objects listed in the transaction log in the case that  $V_S - V_{C2} \leq N$ . And third, a partial upload of the prevailing values of all the dynamic attributes but none of the static attributes in the case that  $V_S = V_{C2}$ .

Figure 4 shows that without the benefit of the transaction log, the data mirroring restoration method of the present invention degenerates to the complete upload in the case that  $V_S > V_{C2}$ , or a partial upload of the prevailing values of all the dynamic attributes but none of the static attributes in the case that  $V_S = V_{C2}$ . It should be noted that in such a degenerate version, the master



synchronization counter  $V_S$  and the synchronization counters  $V_C$  may count attributes instead of data objects since the outcome of the decision as whether to upload the prevailing attributes of all the static attributes in the master volume of data or not will be the same in both cases.

While the invention has been described with respect to a limited number of embodiments, it will be appreciated that many variations, modifications, and other applications of the invention can be made within the scope of the appended claims.

**Claims:**

1. For use in a distributed system including a server managing a master volume of data including a plurality of at least one static attribute and at least one dynamic attribute whose prevailing values in the master volume of data are respectively updated and not updated as a consequence of a command from a client, and at least two clients C1 and C2 each managing a volume of data intended to mirror the master volume of data, a method for data mirroring restoration at a client freshly reconnected to the server after a communication downtime period, the method comprising the step of:

(a) storing prevailing values of dynamic attributes of the master volume of data in temporary storage at the server;

(b) storing prevailing values of static attributes of the master volume of data in persistent storage at the server;

(c) providing the server with a master synchronization counter  $V_S$  incremented by the updating of the prevailing values of one or more static attributes in the master volume of data as a consequence of a command from a first client C1 of the at least two clients;

(d) providing each client with a synchronization counter  $V_C$ , the synchronization counter  $V_{C2}$  of a second client C2 of the at least two clients only being synchronized with the master synchronization counter  $V_S$  on the successful uploading of the prevailing values of the static attributes updated in the master volume of data as a consequence of the command from the first client C1 whereby its volume of data mirrors the master volume of data; and

(e) uploading from the master volume of data to the freshly reconnected client's volume of data, the prevailing values of all its dynamic attributes and, in the case that its synchronization counter  $V_{C2} < V_S$ , the prevailing values of at least all of its static attributes whose prevailing values were updated during the communication downtime period, otherwise in the case that  $V_S = V_{C2}$ , taking no data mirroring restoration action in respect of the static attributes.

2. The method according to claim 1 wherein step (e) includes the uploading the prevailing values of all the static attributes from the master volume of data to the freshly reconnected client's volume of data in the case that its synchronization counter  $V_{C2} < V_S$ .

3. The method according to claim 1 wherein step (c) includes providing the server with a transaction log for listing upto N data object identifiers of data objects containing at least one static attribute on a First In First Out (FIFO) basis in respect of the updating of the prevailing values of one or more of their static attributes, and step (e) includes the uploading from the master volume of data to the freshly reconnected client's volume of data the prevailing values of either all the static attributes in the case that  $V_S - V_{C2} > N$ , or all the static attributes of the last  $V_S - V_{C2}$  data objects listed in the transaction log in the case that  $V_S - V_{C2} \leq N$ .

4. The method according to claim 3 further comprising the step of:

(f) when the transaction log is full, deleting an earlier listing of a data object therefrom, if it exists, on adding the same data object thereto, whereby the transaction log contains at most only a single listing of a data object, if at all.

5. A computer program capable of running on a computer so that the system comprising the computer program plus the computer carries out the method according to any one of claims 1 to 4.

6. A telecommunication network management system carrying out the method according to any one of claims 1 to 4.

Respectfully submitted,

Simon Kay, Patent Attorney

1/4

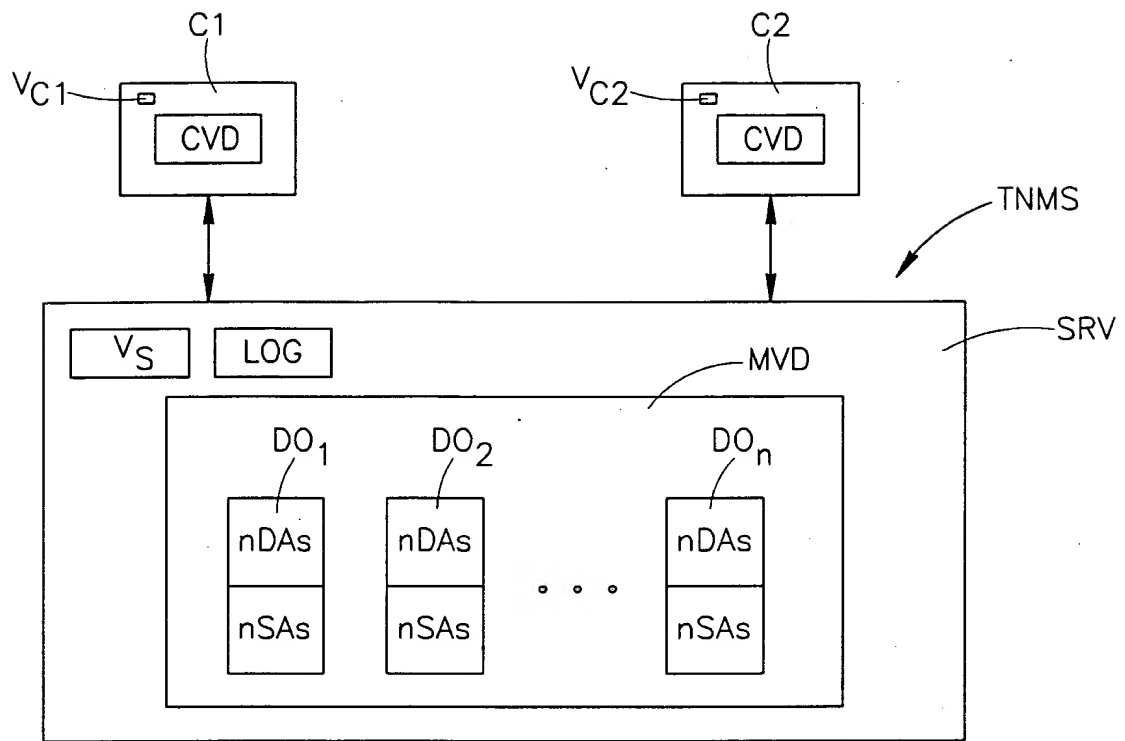


FIG.1

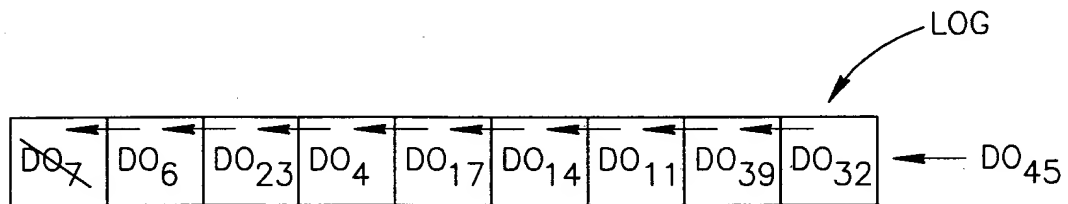


FIG.2A

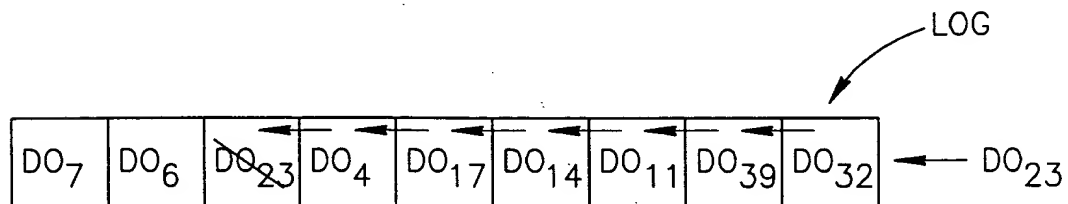


FIG.2B

2/4

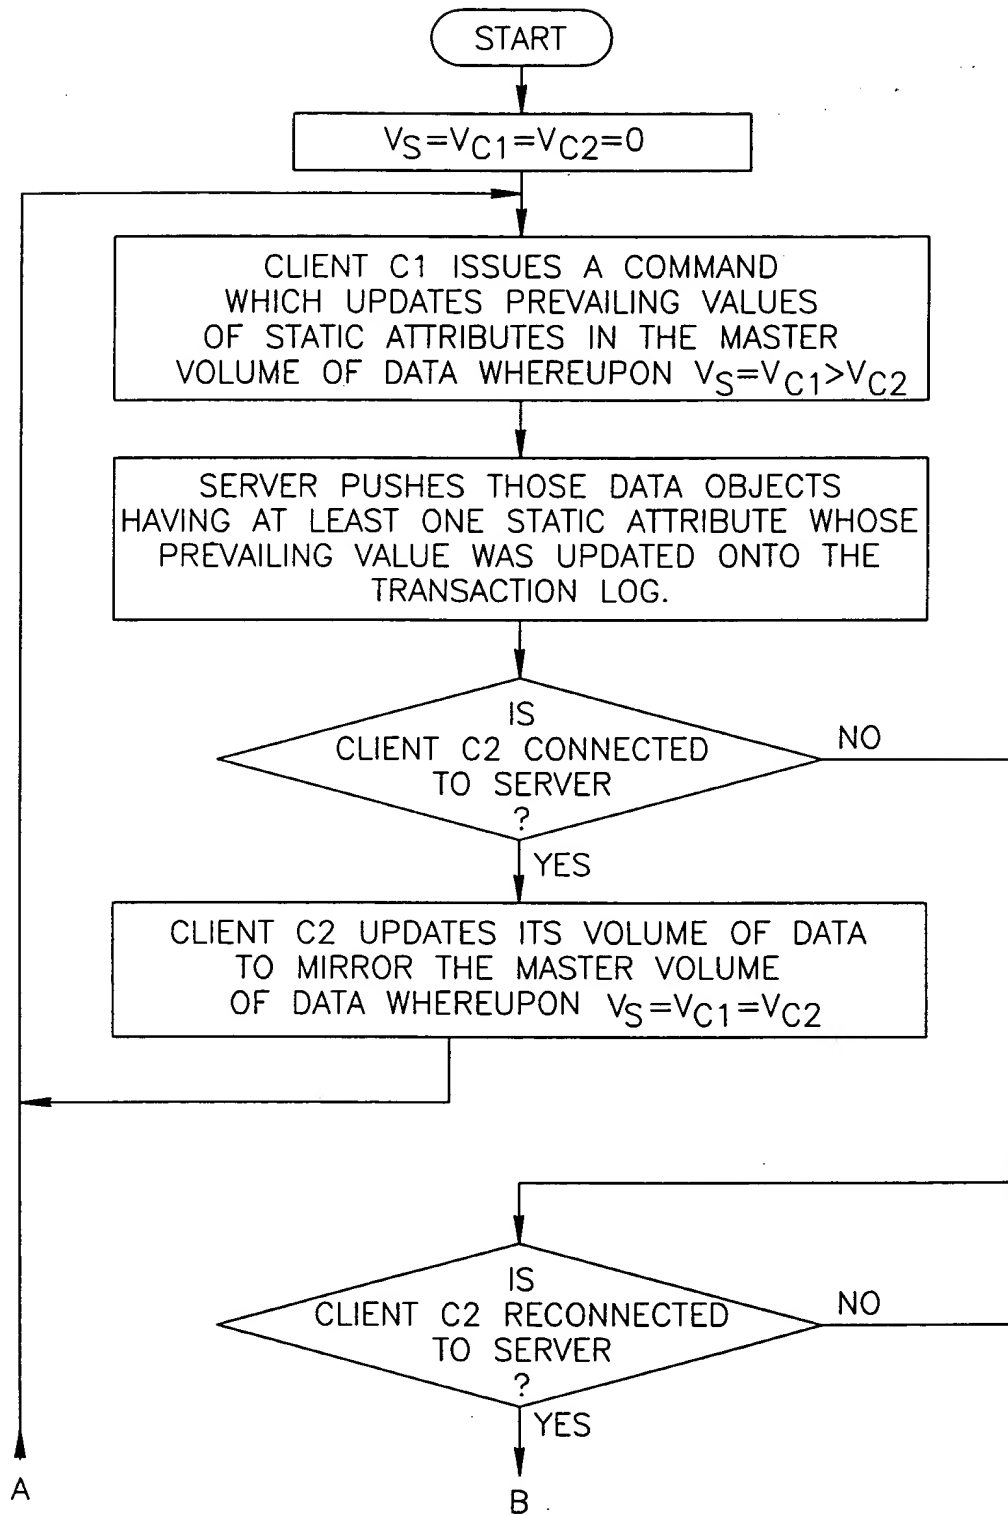


FIG.3A

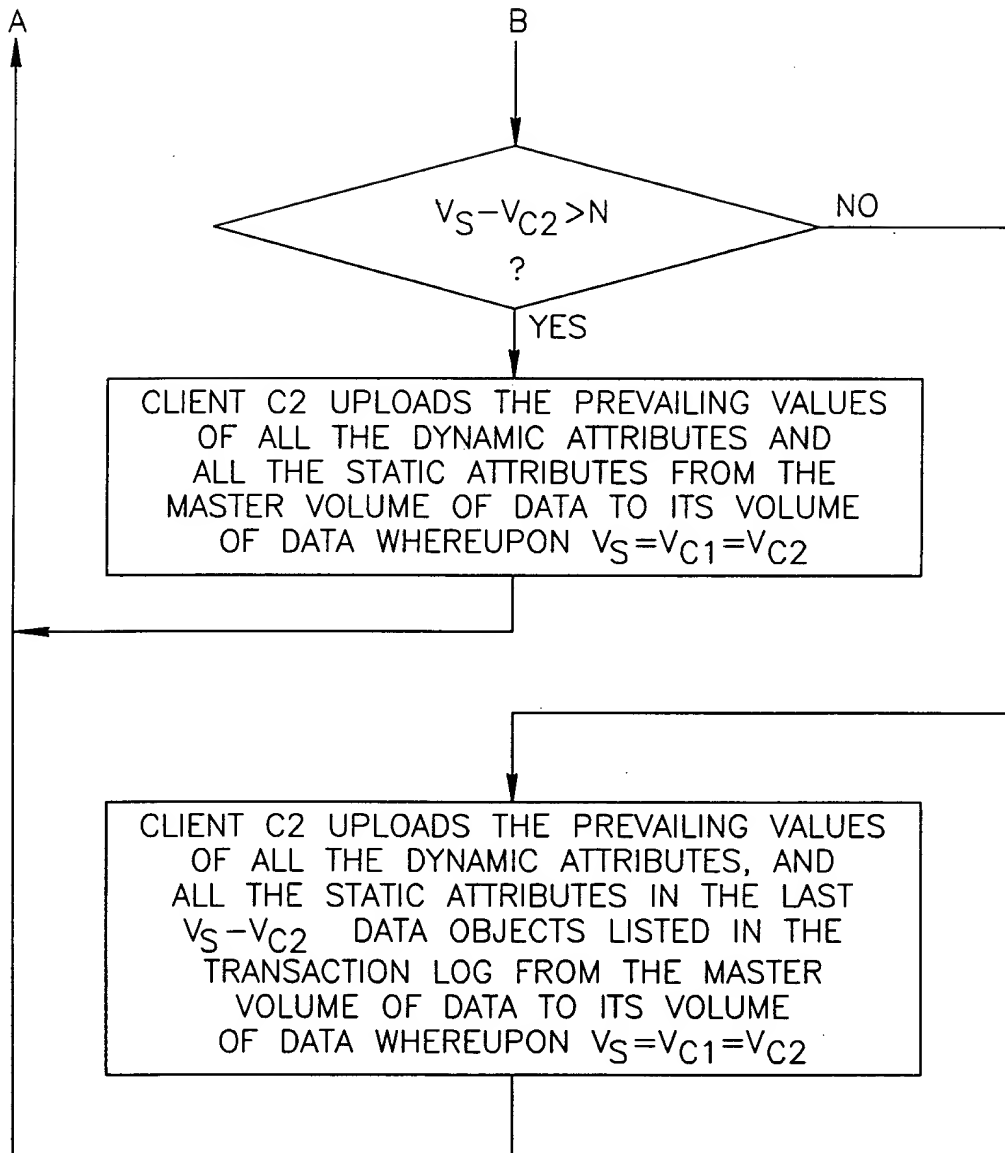


FIG. 3B

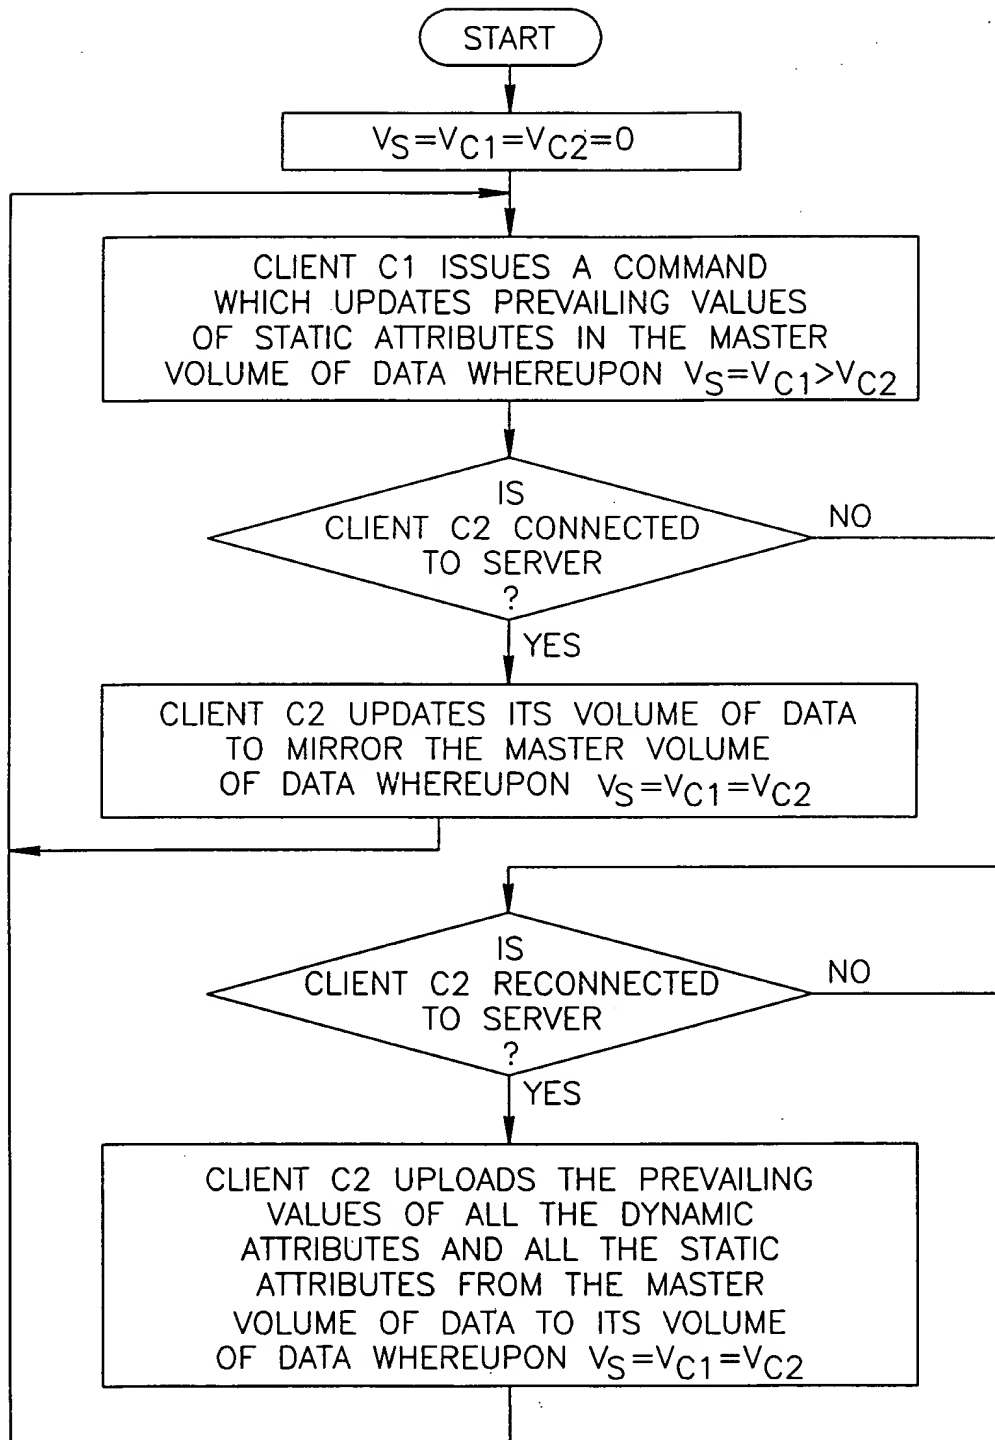


FIG.4